


- NOTES:**
1. USE MATING CORDSET CK 12-11-* (* = CABLE LENGTH IN METERS).
 2. BOX HEIGHT = 34.5 NOMINAL.
 3. CLEARANCE HOLE FOR M4 [#8] MOUNTING SCREWS (2 NOT INCLUDED).

SPECIFICATIONS

CABLE DATA	
MATING PLUG CABLE	CK 12-0 or CK 12-11-*
MATERIAL	
HOUSING MATERIAL	ALUMINUM ALLOY
CONNECTOR	NICKEL PLATED BRASS
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACT	GOLD PLATED BRASS
ELECTRICAL DATA	
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4.0 A per PORT, 8.0 A TOTAL
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

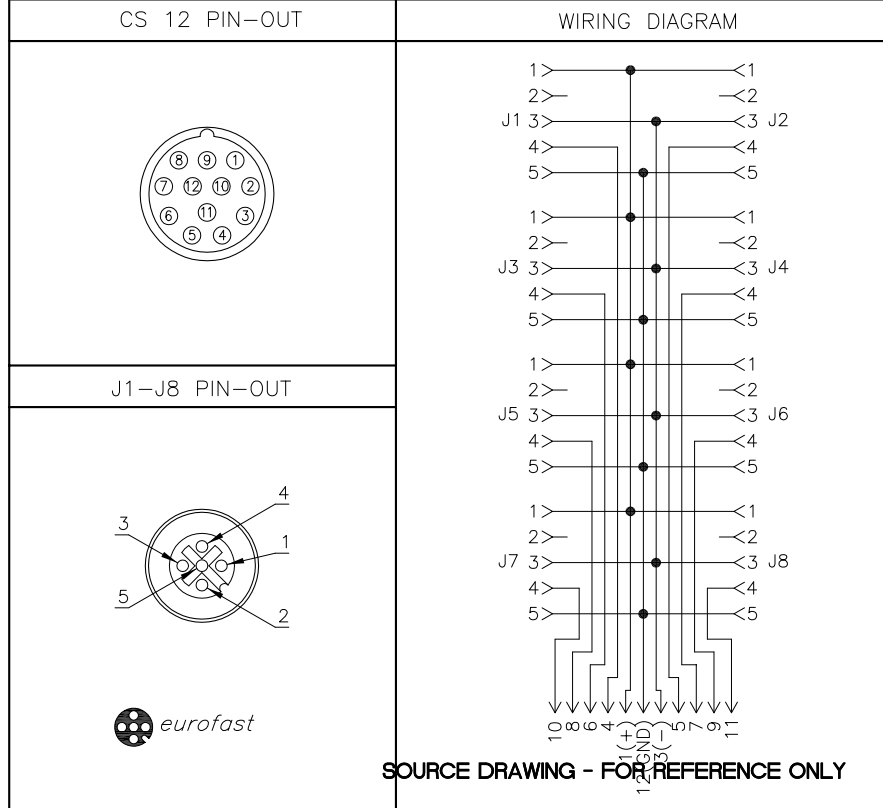

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL	DRFT IK	DATE 11/4/98	DESCRIPTION VBM 80-CS12	
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DSGN	SCALE 1=2	IDENTIFICATION NO. U0114-12	
		UNIT OF MEASUREMENT MILLIMETERS		REV C	
DO NOT SCALE THIS DRAWING			FILE: U0114-12		SHEET 1 OF 1