


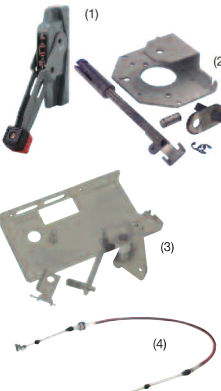


# UL 98 Fused Rotary Disconnect Switches—100A

Standard Class J

For a Complete Assembly, Please Select:

SWITCH		<b>Switch</b>												
		<b>Amp Rating</b>	<b>Fuse Class</b>	<b>Number of Poles</b>	<b>SCCR</b>	<b>Max Horsepower Rating</b>						<b>Wire Size</b>	<b>Wire Type</b>	<b>Part Number</b>
						<b>1-Phase 220/240Vac</b>	<b>220/240Vac</b>	<b>440/480Vac</b>	<b>600 Vac</b>	<b>DC*</b>				
		100	J	2	200kA	10	-	-	-	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-2
100	J	3	200kA	-	30	60	75	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-3		
100	J	4	200kA	-	30	60	75	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-4		
* DC Ratings use two poles in series.														
+														
HANDLE		<b>Direct Mount Handle - mounts directly to switch, no shaft required</b>												
		<b>For Switch Part Number</b>	<b>Color</b>	<b>Test Function</b>	<b>Padlockable</b>							<b>Part Number</b>		
		All Switches	Black	Y	Y							DIR-07		
or														
Select for Standard Applications		<b>External Front Operated Pistol Handles - shaft required</b>												
		<b>NEMA Type</b>	<b>Color</b>	<b>Test Function</b>	<b>Padlockable</b>	<b>Defeatable</b>							<b>Part Number</b>	
		1, 3R, 12	Black	N	Y	Y							H12-03B	
		1, 3R, 12	Red/Yellow	N	Y	Y							H12-03R	
		1, 3R, 4, 4X, 12	Black	N	Y	Y							H4X-06B	
		1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y							H4X-06R	
		1, 3R, 4, 4X, 12	Black	Y	Y	Y							H4X-06TB	
		1, 3R, 4, 4X, 12	Red/Yellow	Y	Y	Y							H4X-06TR	
		<b>Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required</b>												
		<b>NEMA Type</b>	<b>Color</b>	<b>Test Function</b>	<b>Padlockable</b>	<b>Defeatable</b>							<b>Part Number</b>	
		1, 3R, 4, 4X, 12	Black	N	Y	Y							H4X-06BHD	
		1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y							H4X-06RHD	
		<b>External Right Side Operated Pistol Handles - shaft required</b>												
		<b>NEMA Type</b>	<b>Color</b>	<b>Test Function</b>	<b>Padlockable</b>	<b>Defeatable</b>							<b>Part Number</b>	
		1, 3R, 4, 4X, 12	Black	N	Y	N/A							H4X-06SB	
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	N/A							H4X-06SR			
<b>Shafts for Pistol Handles</b>														
<b>Length in (mm)</b>	<b>Mounting Depth (X) in (mm)</b>										<b>Part Number</b>			
7.9 (200)	5.30~9.06 (135~230)										SH5-200			
12.6 (320)	5.30~13.78 (135~350)										SH5-320			
15.7 (400)	5.30~16.93 (135~430)										SH5-400			
or														
	<b>Flange Handle<sup>(1)</sup> - requires shaft operated mechanism or cable operated mechanism + cable</b>													
	<b>NEMA Type</b>	<b>Flange Style</b>	<b>Test Function</b>	<b>Padlockable</b>	<b>Defeatable</b>							<b>Part Number</b>		
	1, 3R, 4, 12	Standard	N	Y	Y							FLH1		
	1, 3R, 4, 4X, 12	Chrome Plated	N	Y	Y							FLH2		
	<b>Shaft Operated Flange Mechanism<sup>(2)</sup> - includes shaft</b>													
	<b>For Enclosure Depth in (mm)</b>											<b>Part Number</b>		
	6~24 (152~613)											FLRM		
	<b>Cable Operated Flange Mechanism and Cable - must select Mechanism<sup>(3)</sup> and Cable<sup>(4)</sup></b>													
	<b>Item / Length</b>											<b>Part Number</b>		
	Cable Mechanism											FLCM		
36" (900mm) Cable											FLC36			
60" (1500mm) Cable											FLC60			
120" (3000mm) Cable											FLC120			